

TIME TO SHINE WITH


durashine[®]
PRO

Available with



**Advanced Coating
Technology**


durashine[®]
PRO

Colour Coated Steel for
Roof & Wall Cladding



Higher Scratch
Resistance



Cool
Roofing



Dirt
Resistance



Superior UV
Protection



Tested &
Proven



BIS
Approved✓

Dirt Resistance

DURASHINE® Pro advanced coating keeps dirt from sticking to the surface, making it easy to clean with every wash. Your roof stays looking new, wash after wash.

DURASHINE® Pro Roof

Before Cleaning




After Cleaning



Scratch Resistance

DURASHINE® Pro with high scratch resistance ensures superior durability during material handling and installation. The tough coating prevents scratches and maintain the aesthetic appeal of building.

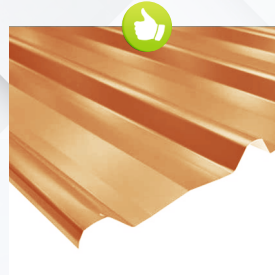


DURASHINE® Pro roof sheeting: high scratch resistant painted surface for superior durability



Conventional roof sheets have basic scratch resistance and are prone to scratching easily

DURASHINE® Pro Roof

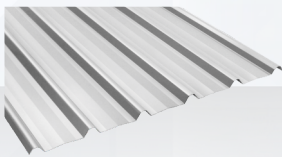


Effective Cover Width (mm)
Nominal 1015

Overall Width (mm)
Nominal 1072

Minimum Roof Slope (degrees)
5


DURASHINE® Pro Wall

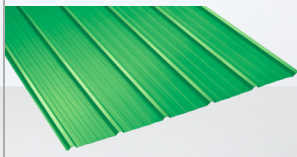

Effective Cover Width (mm)
Nominal 1110

Overall Width (mm)
Nominal 1150


DURASHINE® Pro Liner

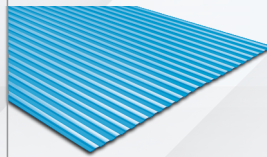

Effective Cover Width (mm)
Nominal 1110

Overall Width (mm)
Nominal 1173

DURASHINE® Pro Tile

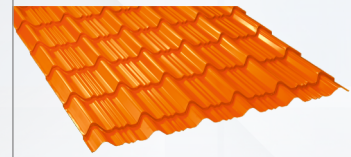

Effective Cover Width (mm)
Nominal 1000

Overall Width (mm)
Nominal 1090

Total Painted Thickness (mm): 0.35 mm, 0.40 mm, 0.45 mm, 0.50 mm, 0.55 mm and 0.60 mm

Sheet Length* (feet): 8 (2440 mm), 10 (3050 mm), 12 (3660 mm), 14 (4270 mm), 16 (4880 mm), 18 (5490 mm), 20 (6100 mm), 22 (6710 mm), 24 (7320 mm)

* Sheet length in feet is approximate value

All Accessories are also available in standard colours

Available standard colours*

Pro Black™

Pro Den Blue™

Pro Grey™

Pro Orange™

Pro Pearl™

Pro White™

Colour shades are for reference only and actual colour of the product may vary. Colour range and product range is subject to availability. The above product is subject to the guidelines available at www.tatabluescopesteel.com and this shall not be construed as warranty or guarantee of the product of any kind whatsoever.

Disclaimers:

Condensation is a natural formation of water droplets on the bottom side of any installed metal roofing sheet. It may occur when there is a difference in temperature between the air in the building and the sheet itself, causing the water vapour (moisture) in the air to condense on the inside of the sheet. It is a natural phenomenon and hence no claims will be entertained in this regard. The risk of condensation may be minimised by providing proper ventilation arrangement in the roofs and by using suitable insulation.



Remove guard film immediately after installation of the DURASHINE® PRO.



Maintenance Recommendation: Clean and maintain your DURASHINE® PRO regularly.



Instructions for fasteners: Use carbon free washers with Class 3 fasteners for installing DURASHINE® PRO and accessories.

Dealer Name and Address



Download the Tata BlueScope Steel App



1800 270 8333

Toll Free

Email: durashine@tatabluescopesteel.com
Website: www.tatabluescopesteel.com

Follow us on
Social Media

